

Overview

The host CDC project is a simple demonstration program based on the MCUXpresso SDK. It enumerates a COM port and echoes back the data from the UART as follows:

1. The host CDC receives data from the UART, which is plugged in the PC. Type characters in the terminal tool, such as Tera Term, and the characters are sent to the host example.
2. After the host example receives data from the UART, it sends the data to the device virtual COM.
3. After the data has been sent to the device virtual COM successfully, it receives the same data from the device virtual COM.
4. If the host has received the data, it sends data to the UART using the UART driver API. The UART echoes back data to the PC.

System Requirement

Hardware requirements

- Mini/micro USB cable
- USB A to micro AB cable
- Hardware (Tower module/base board, and so on) for a specific device
- Personal Computer(PC)

Software requirements

- The project path is:
<MCUXpresso_SDK_Install>/boards/<board>/usb_examples/usb_host_cdc/<rtos>/<toolchain>.

Note

The <rtos> is Bare Metal or FreeRTOS OS.

Getting Started

Hardware Settings

- The Jumper settings:
J9 1-2 high speed mode,2-3 full speed mode; J10 open high speed, shunt full speed; J11 2-3, J12 2-3, J13 2-3 , need provide external power through J1.

Note

Set the hardware jumpers (Tower system/base module) to default settings.

Prepare the example

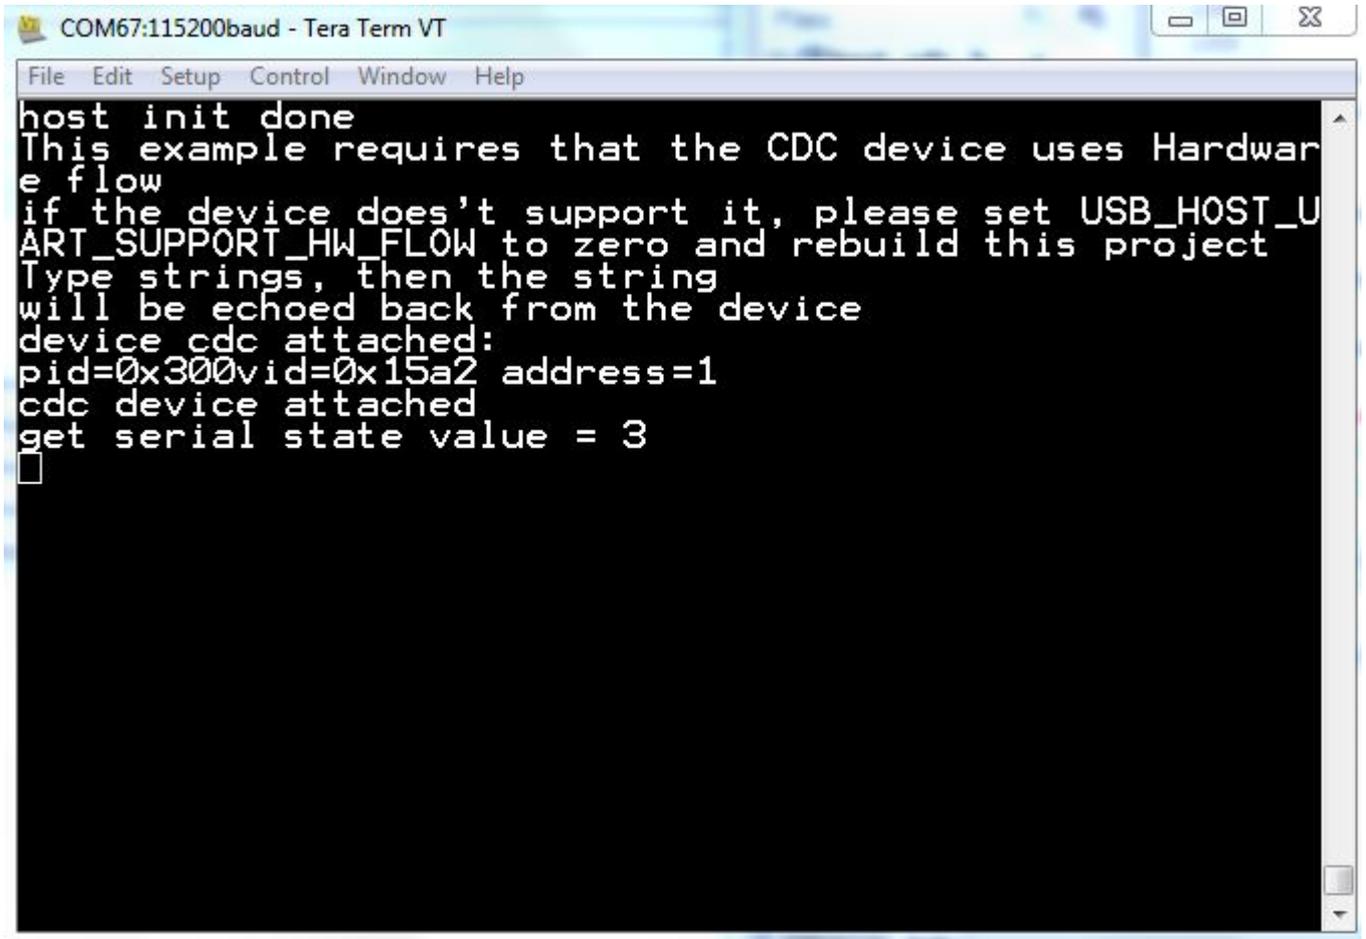
1. Download the program to the target board.
2. Power off the target board and power on again.
3. Connect devices to the board.

Note

For detailed instructions, see the appropriate board User's Guide.

Run the example

1. Run the `host_cdc_serial` example. The printed guide is displayed. Follow the guide to modify the demo.
2. Plug in the CDC device. The attached information is printed out.
3. Type a string and the string is sent to the CDC device if the string length is greater than `USB_HOST_SEND_RECV_PER_TIME`. If the length is shorter than the `USB_HOST_SEND_RECV_PER_TIME`, the string is echoed back later. After that, the CDC host reads back the string and puts it to `stdout`.

A screenshot of a Tera Term VT terminal window. The window title is "COM67:115200baud - Tera Term VT". The terminal displays the following text:

```
host init done
This example requires that the CDC device uses Hardware flow
if the device doesn't support it, please set USB_HOST_UART_SUPPORT_HW_FLOW to zero and rebuild this project
Type strings, then the string will be echoed back from the device
device cdc attached:
pid=0x300vid=0x15a2 address=1
cdc device attached
get serial state value = 3
□
```

Figure 1: Host cdc output