

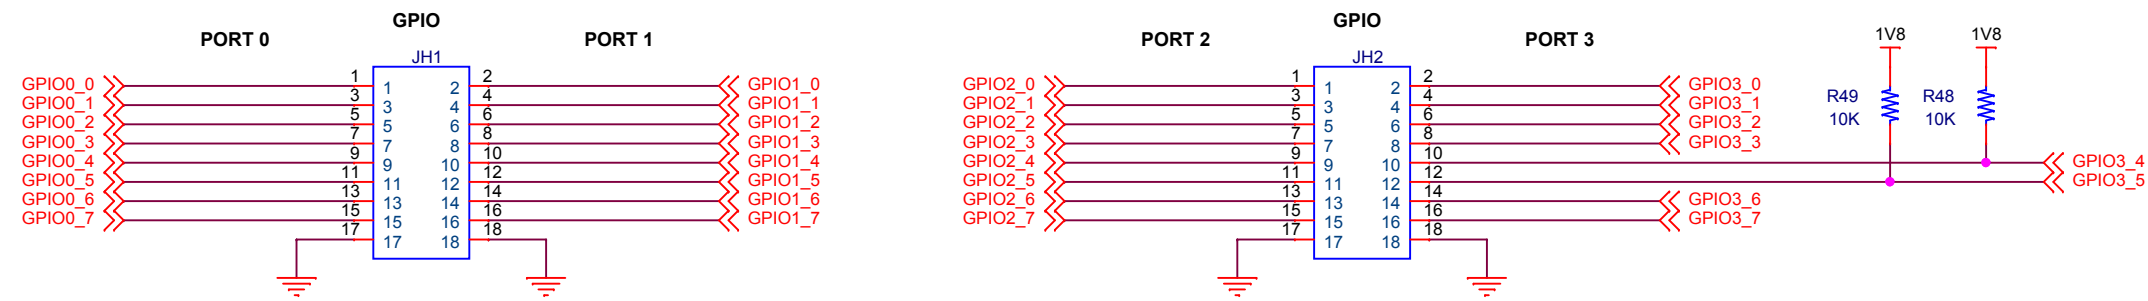




GPIO HEADERS

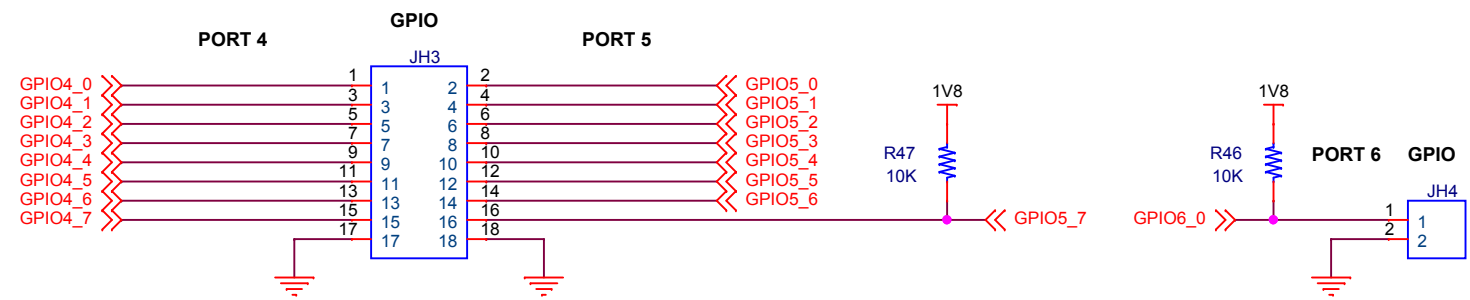


GENERAL PURPOSE PB SWITCHES

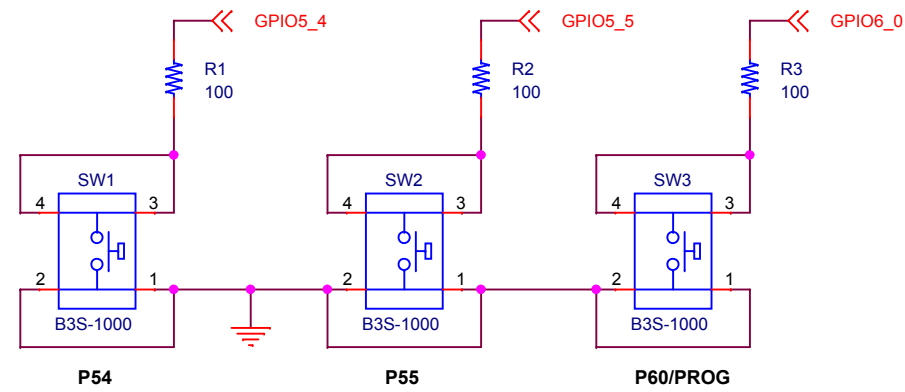


PROTOTYPE AREA

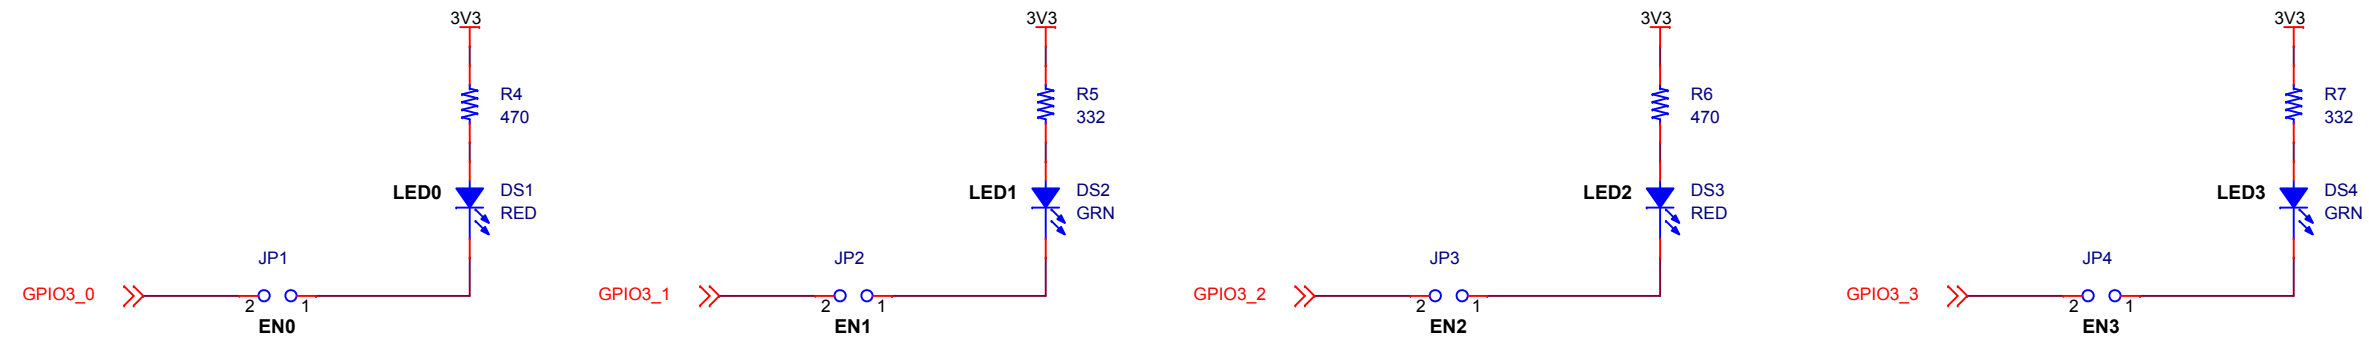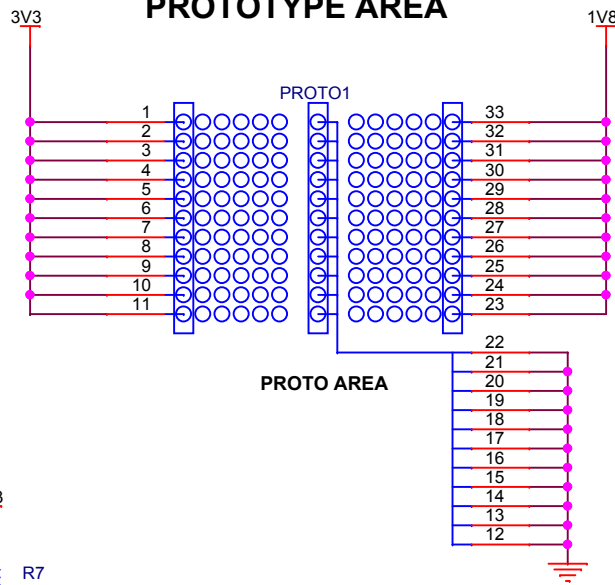


GENERAL PURPOSE LEDs
(NOTE: Configure GPIOs as open-drain due to LED 3.3V supply voltage)

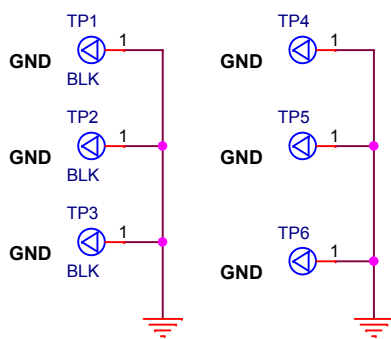

PLACE 0 OHM RESISTORS CLOSE TO DUT.
USED FOR SCK TERMINATION IF NEEDED

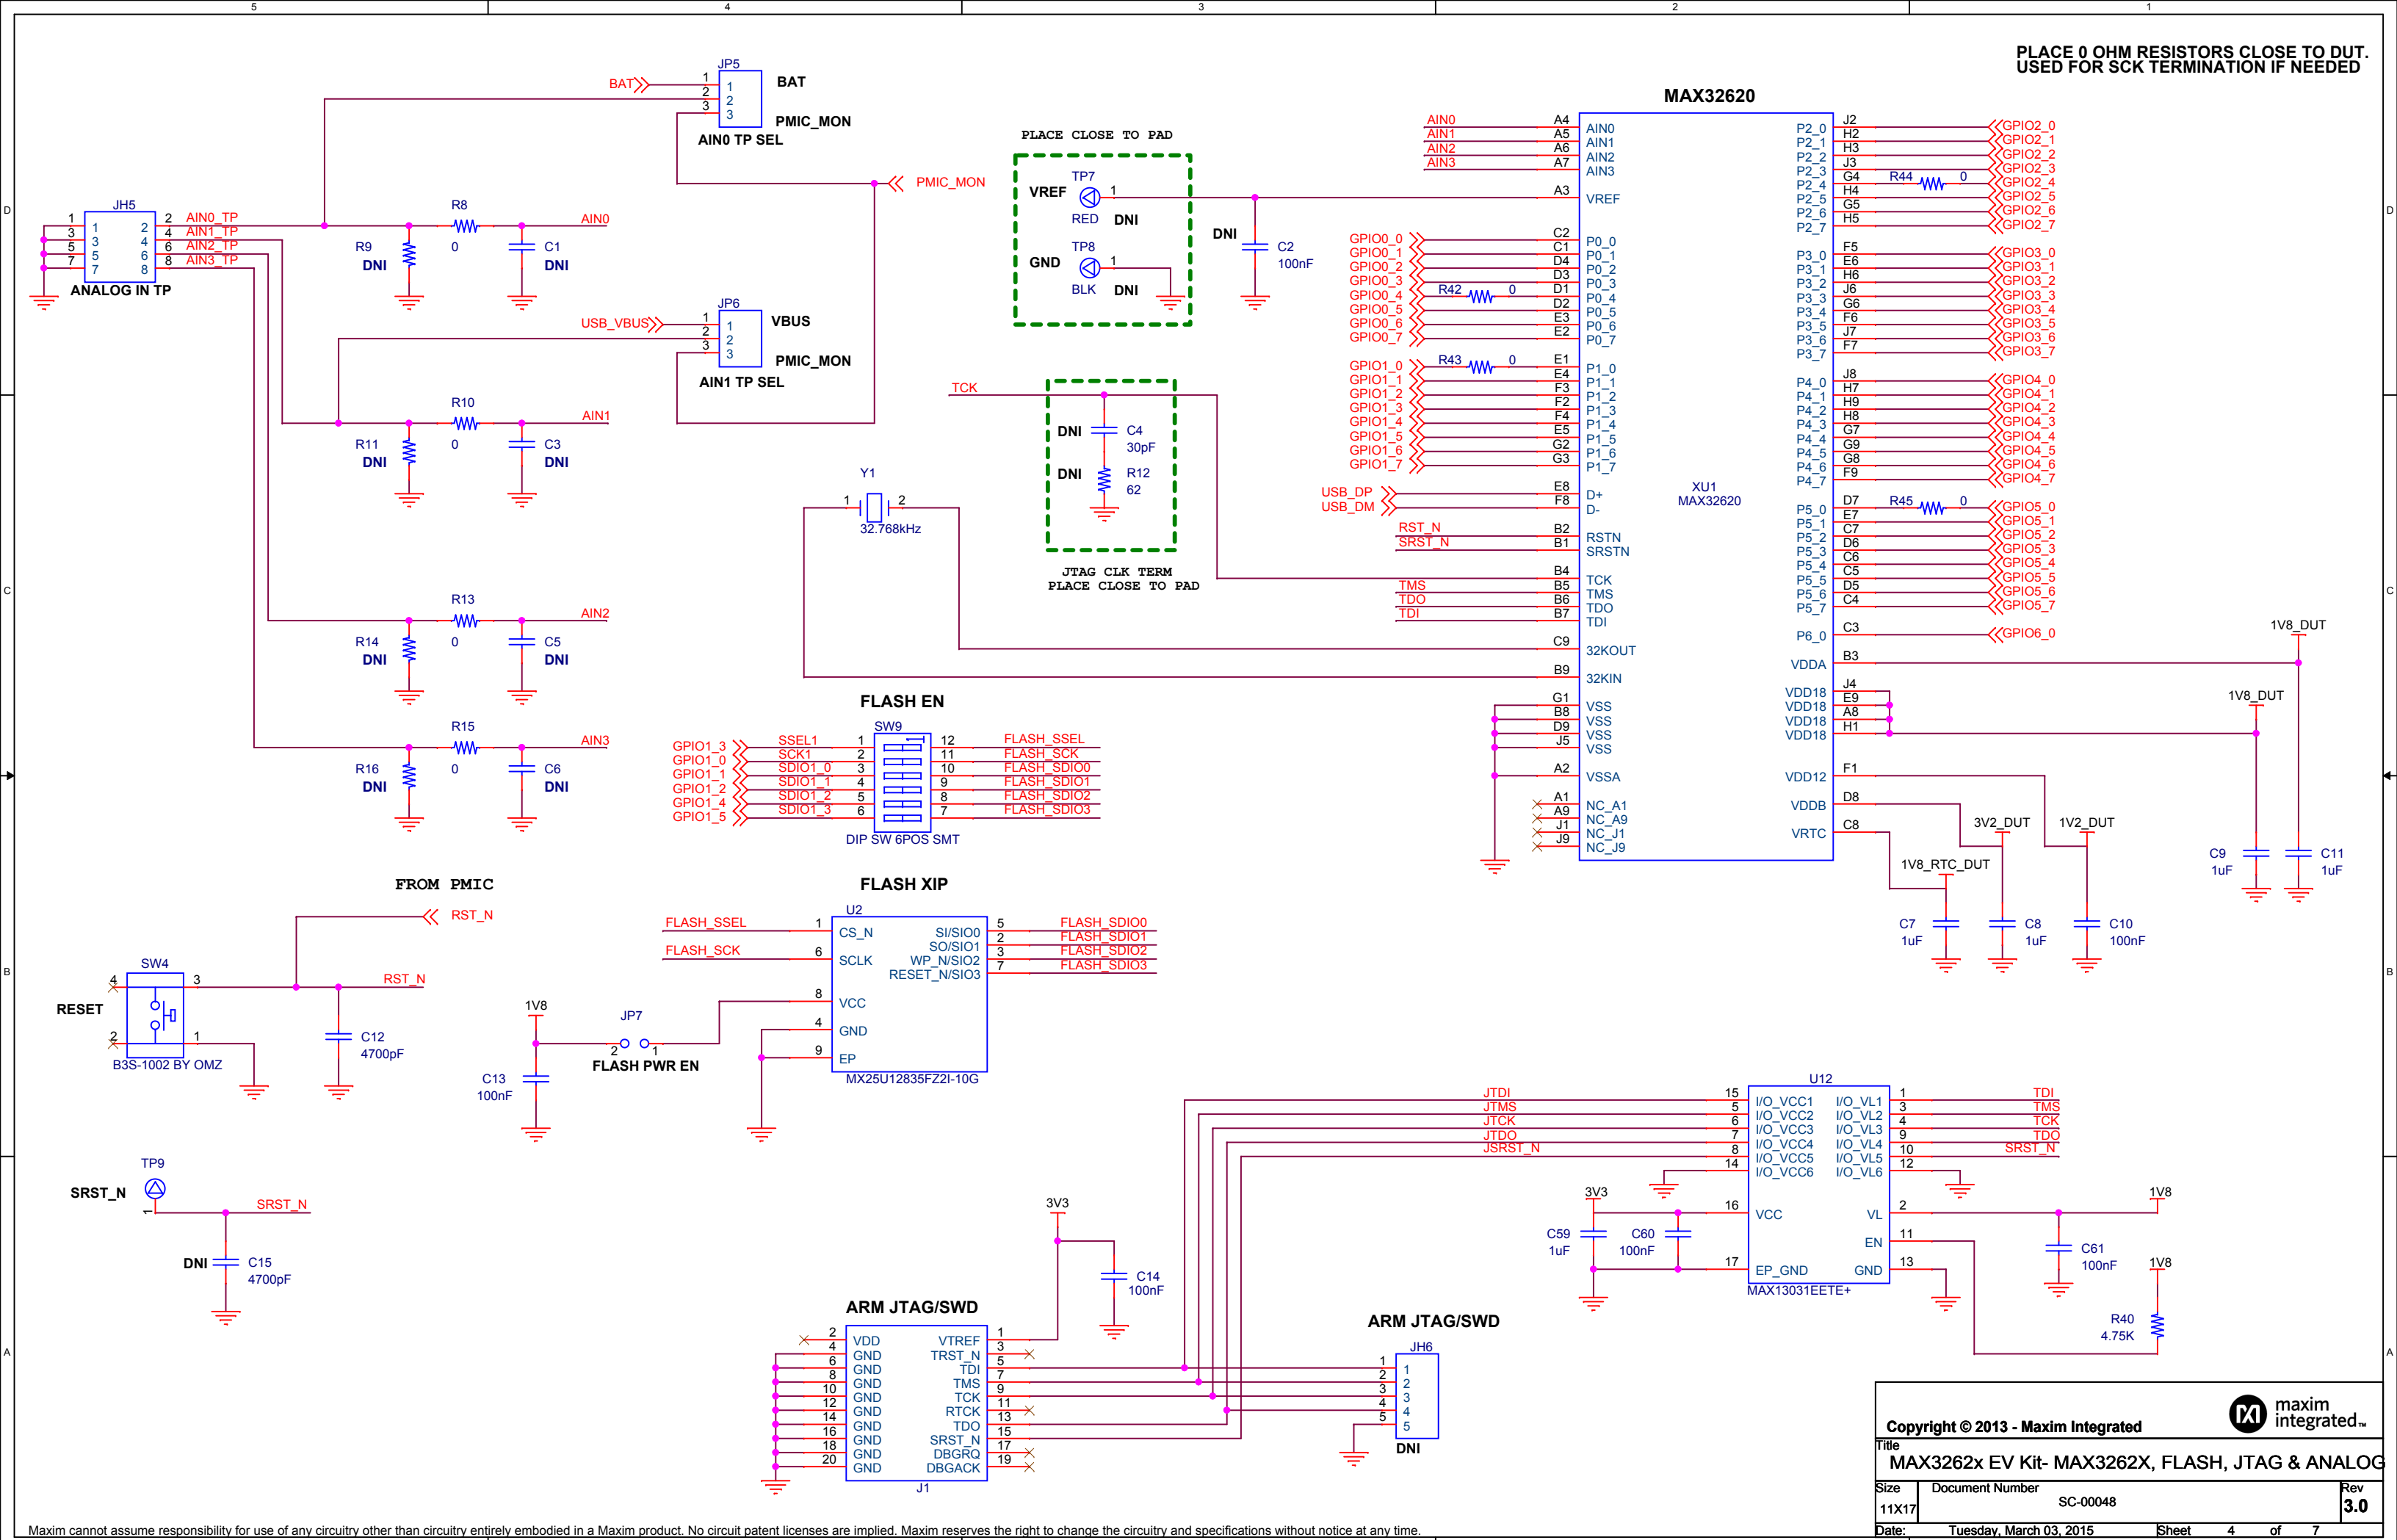

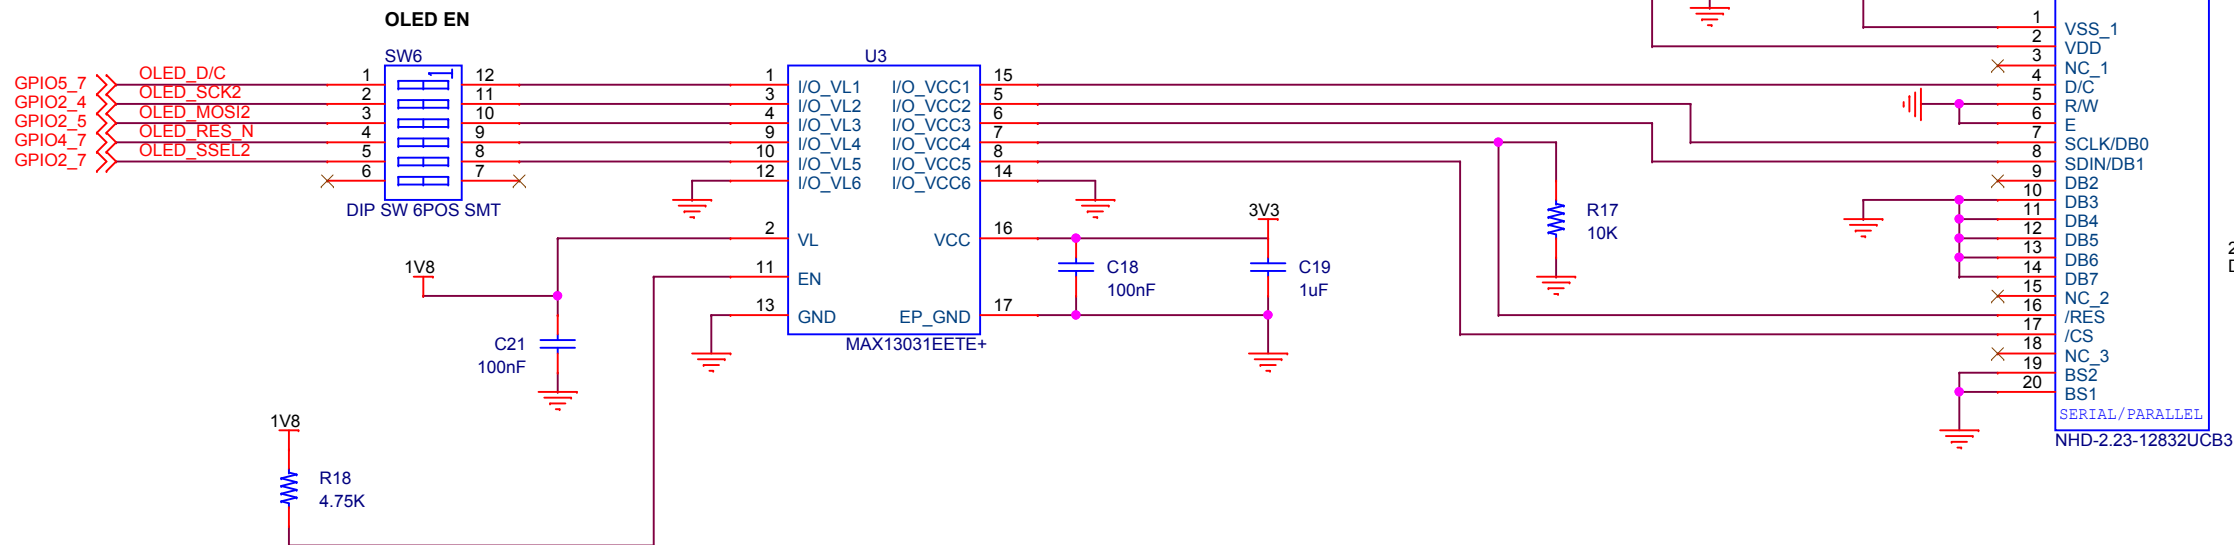

BLUETOOTH LOW ENERGY

